


Fiberlign® Cushion Clamp



General Recommendations

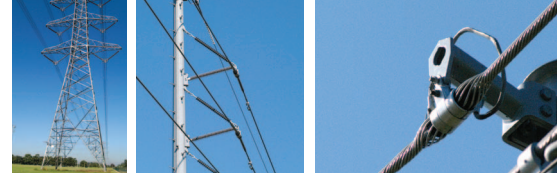

The Fiberlign® Cushion Clamp provides excellent protection to OPGW at support points. The combination of the Structural Reinforcing Rods and the elastomer inserts at the ends of the clamp body halves reduces bending stresses on the OPGW during aeolian vibration or galloping activity. The Cushion Clamp is designed to suit LV or HV power systems with spans up to 250m. For spans greater than 250m, Fiberlign® Suspension or support are recommended.

Lay Direction:

The Cushion Clamp can accommodate either left-hand lay or right-hand lay OPGW.

Line Angles:

The maximum recommended line angle for a single Fiberlign® Cushion Clamp is 30°. For line angles up to 60°, the Double suspension cushion clamp is recommended.

- Product subject to cable design, constructions and testing.
- Contact PLP with project and cable specification for product recommendation.

For Application Procedures, visit the PLP website.

www.preformed.com.au