


Twin Spacers



General Recommendations

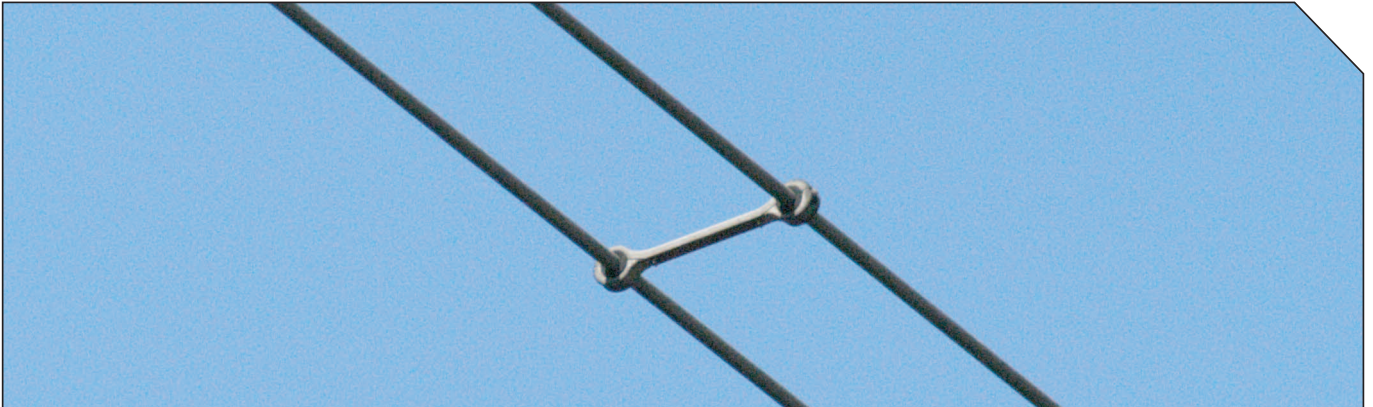

PLP's Twinlok spacer is designed to meet Australian standards combining strength and performance, while still maintaining a lightweight design. The semi-conductive cushion inserts protect the outer stranding of the conductor, whilst the strengthened aluminium frame is designed to protect against conductor clashing without deformation.

A high strength quarter turn fastener is used in the conductor clamping element to insure proper installation. This design provides consistent compression of the inserts and ease of installation, without relying on specific bolt torques or bolts with breakaway heads.

For Application Procedures, visit the PLP website.
www.preformed.com.au