


# Aluminium Flexible Connectors

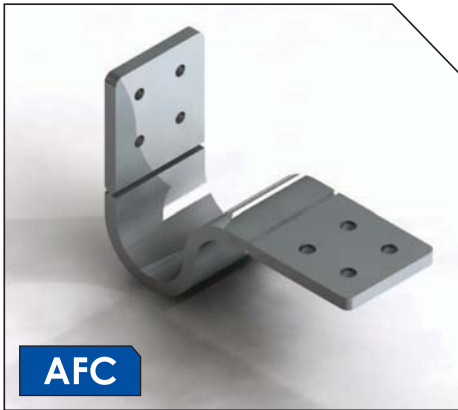

**AFC**

## TYPE 'E'

Type 'E' flexible connectors are used at disconnector positions and in conjunction with fixed or roller supports. They are designed to be mounted under the disconnector palm. Centre of busbar to upper palm surface dimension should be 130mm + thickness of disconnector palm.

Note: maximum ratings are shown for various palms. Other palms can be requested for custom applications; however fittings may be de-rated to suit.

Current Rating (A)	Laminations (mm)	Lamination Width (mm)	Palm Number	Palm Thickness (mm)
1500	14 x 1.2mm	100	AS5	16
1650	16 x 1.2mm	100	AS5	20
2000	13 x 1.2mm	130	AS8	16
2500	16 x 1.2mm	130	AS8	20
2500	16 x 1.2mm	130	AS9	20
3150	17 x 1.2mm	200	AS9	20

- Nominate palm type e.g. (AS5, AS8, etc...)
- Nominate separation length and height

# Busbar Joint Sleeves

## Busbar Joint Sleeves



**BBS**

Part Number	Busbar Outer Ø (mm)	Busbar Inner Ø (mm)	Length (mm)
BBJS-100-80	100	80	300
BBJS-100-88	100	88	300
BBJS-100-92	100	92	300
BBJS-100-94	100	94	300
BBJS-125-105	125	105	300
BBJS-125-113	125	113	300

### PART NUMBER SYSTEM

BBJS	Busbar Joint Sleeve
100	Busbar Outer Diameter (mm)
80	Busbar Inner Diameter (mm)

