


PREFORMED™ Lineguards



General Recommendations

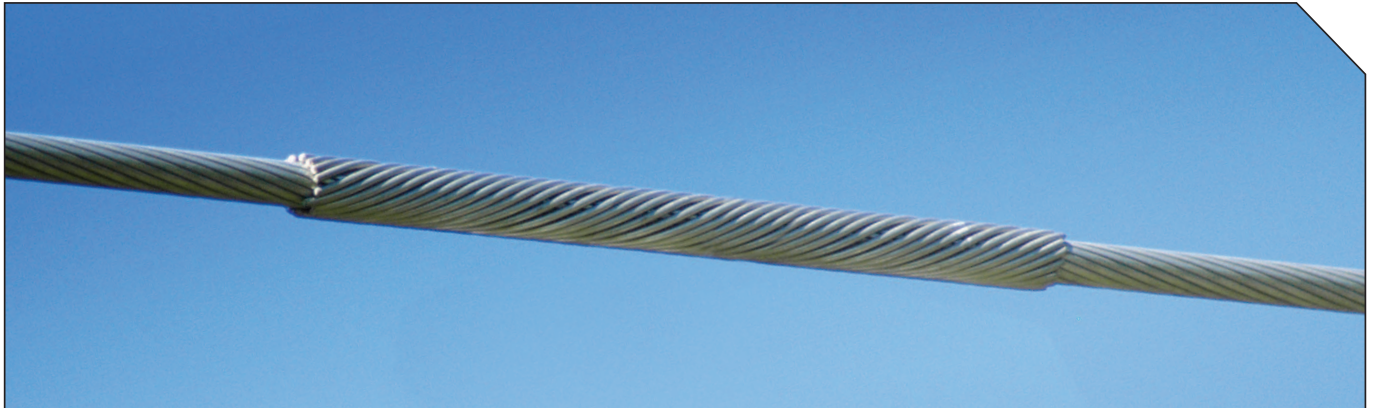

Preformed Lineguards provide economical conductor protection at points of support (and taps) in urban type distribution systems where low working tensions and short conductor spans are common.

Preformed Lineguards are intended to protect against abrasion, arc-over and may be used as patch rods designed to restore full conductivity and strength to conductors where damage is located outside the support area and does not exceed 25% of the outer strand layer. Preformed Lineguards are recommended as a minimum protection for hand-tied insulators.

Both in initial installation cost and in long-term cost, Preformed Lineguards virtually eliminate the possibility of conductor mechanical failure at support points.

Preformed Lineguards may be used as tap armour to protect conductors from wear and flash-over damage under hot-line taps.

For Application Procedures, visit the PLP website.
www.preformed.com.au

SAFETY CONSIDERATION

- This product is intended for a single (one-time) use and for the specified application, although it may be re-applied twice for retensioning within 90 days from initial installation.
- Do not modify this product in any way.
- This product is intended for use by qualified linemen only.
- When working in the area of energised line with this product, extra care should be taken to prevent accidental electrical contact.
- For proper performance and personal safety, be sure to select the proper size PREFORMED™ products before application.
- PREFORMED™ products are precision devices. To ensure proper performance, they should be stored in cartons under cover and handled carefully.